

SAFETY DEVICE


KS-130 Series




- Designed in compliance with all requirements of JIS code.
- Stopping force automatically exerted equally both sides of guide rail and readily adjustable through compression spring on each safety block.
- Full swivel of rail grips provides full and uniform contact on all rail faces when safety is actuated.
- Simple mounting under plank channels spaced for stile members of any size.

MODEL NO. MODEL TYPE

KS1301 Instantaneous
KS1302 Progressive

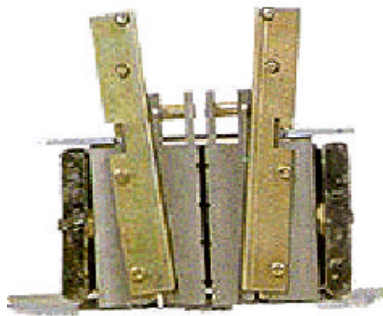

Safety device for 18K and 24K

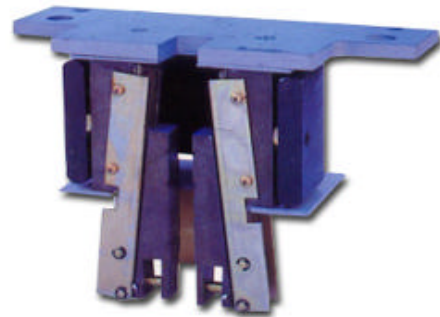

Safety device for 8K and 13K

MODEL NO.	FUNCTION TYPE	MAX. LOAD	SPEED RANGE
KS1301-01	INSTANTANEOUS- 8K	2500	LOWER THAN 60 m/min
KS1301-02	INSTANTANEOUS- 13K	3500	LOWER THAN 60 m/min
KS1301-03	INSTANTANEOUS- 18K	4500	LOWER THAN 60 m/min
KS1301-04	INSTANTANEOUS- 24K	6000	LOWER THAN 60 m/min
KS1301-05	INSTANTANEOUS- 36K	OVER 6000	LOWER THAN 60 m/min
KS1302-01	PROGRESSIVE- 8K	1400	OVER THAN 60 m/min
KS1302-02	PROGRESSIVE- 13K	1800	OVER THAN 60 m/min
KS1302-03	PROGRESSIVE- 18K	2500	OVER THAN 60 m/min
KS1302-04	PROGRESSIVE- 24K	3500	OVER THAN 60 m/min